

- + The easiest to use spas, medical pools
- + Mechanical thermostat



| | RE/LE 3 | RE/LE 6 | RE/LE 9 | RE/LE 12 |
|--------------------------|---------|---------|---------|----------|
| PRODUCT REFERENCE | | | | |
| Standard model | W40LE03 | W40LE06 | W40LE09 | W40LE12 |

EQUIPMENTS

- Electric control box with flow controller
- Rotating mechanical 16-40°C thermostat
- Pin water tightness using EPDM collar
- Hypalon moulded electric connections
- Positive safety high temperature limiters
- Power contactor


TECHNICAL SPECIFICATIONS

| | | | | |
|--|------------------|---------|--------|-------|
| Maximum vol. (m ³) | 20 | 40 | 60 | 80 |
| Operating power (kW)** | 3 | 6 | 9 | 12 |
| Maximum operating power Tri 400 V (A)*** | 5 | 9 | 13 | 18 |
| Power cable size for tri 400 V (mm ²)**** | 5 x 2,5 | 5 x 2,5 | 5 x 4 | 5 x 4 |
| Maximum operating power Mono 230 V (A)*** | 14 | 27 | 40 | |
| Power cable size for Mono 230 V (mm ²)**** | 3 x 4 | 3 x 6 | 3 x 10 | |
| Min. flow (m ³ /h) | 5 | | | |
| Max. flow (m ³ /h) | 22 | | | |
| Hydraulic connection | PVC Ø 50 ou Ø 63 | | | |

* Private open-air pool, temperate climate with an isothermal cover from May 15th to September 15th. ** Manufacturing tolerance of + or -5%. *** Tolerance operating voltage +6 -10%. Grid power supply. **** For a maximum length of 20 metres.

DIMENSIONS (MM) AND WEIGHT

| | RE/LE 3 | RE/LE 6 | RE/LE 9 | RE/LE 12 |
|-------------|---------|---------|---------|----------|
| Weight (kg) | 4 | 4 | 5 | 5 |

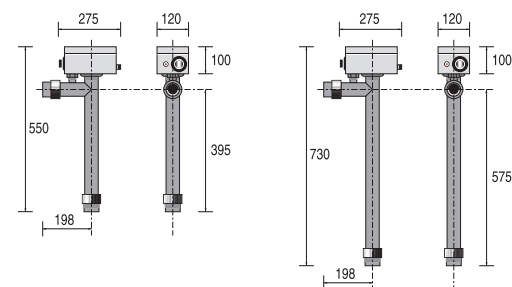

INSTALLATION

- Shipped with wall-mount bracket.
- In-line PVC hydraulic connection, Ø50 or 63.
- Supports any flow direction: just turn the device to match the water flow direction.
- Simplified single-phase 230V -50/60Hz / three-phase 400V-50/60Hz power (three-phase 230 by request). RE/LE: three-phase 400V-50/60Hz only.
- Electric power supply protection with a 30 mA circuit breaker (not included).

